

The image displays four perspective views of a mechanical component, labeled FIG. I, FIG. II, FIG. III, and FIG. IV. Each view shows a different shape and configuration of the component, with various features labeled with numbers.

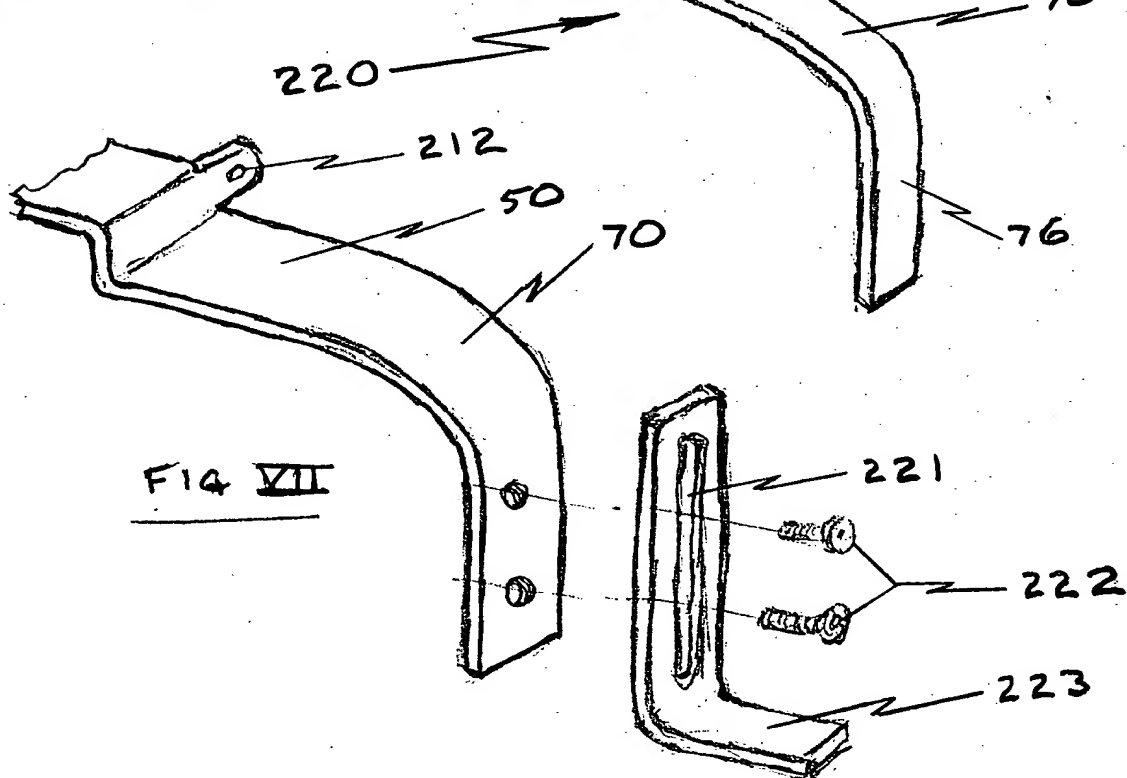
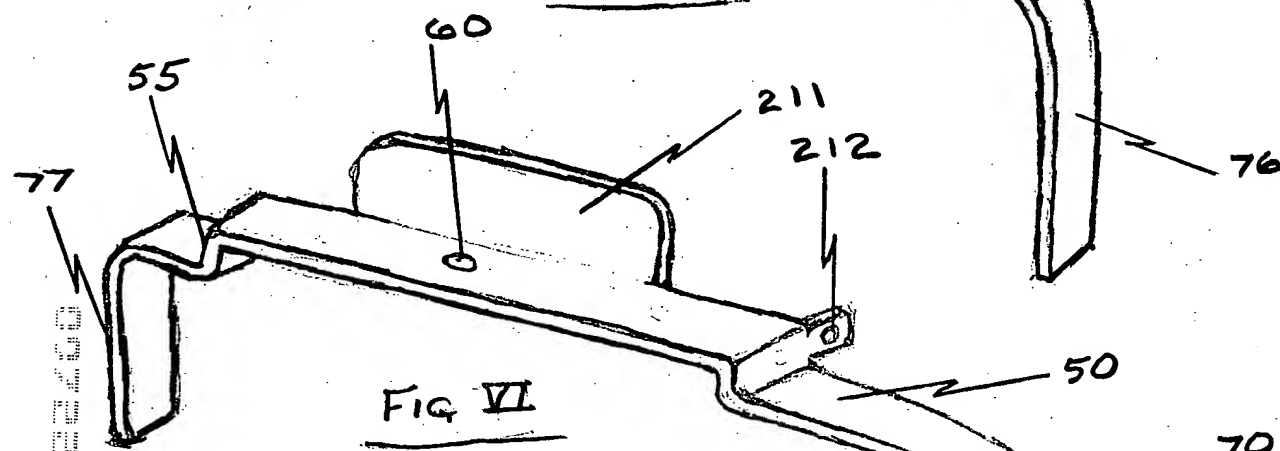
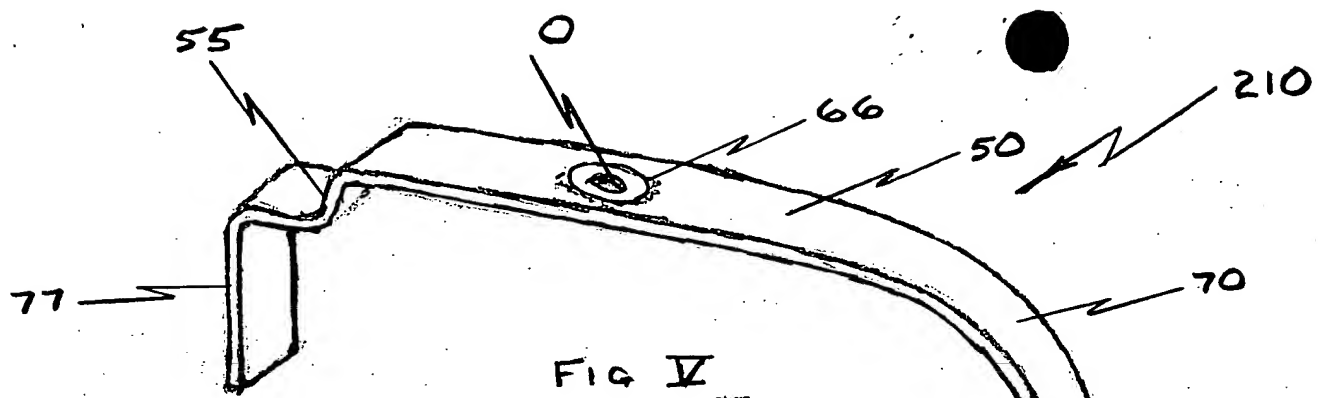
- FIG. I:** A perspective view of a component with a curved end (75), a central slot (60), and a small circular feature (65). The component is labeled with 50, 60, 65, 70, 75, 55, and 20.
- FIG. II:** A perspective view of a component with a curved end (75), a central slot (60), and a small circular feature (65). The component is labeled with 50, 60, 65, 70, 75, 55, and 10.
- FIG. III:** A perspective view of a component with a curved end (75), a central slot (60), and a small circular feature (65). The component is labeled with 50, 60, 65, 70, 75, 55, and 30.
- FIG. IV:** A perspective view of a component with a curved end (75), a central slot (60), and a small circular feature (65). The component is labeled with 50, 60, 65, 70, 75, 55, and 40.

FIG 1

FIG II

FIG III

FIG IV



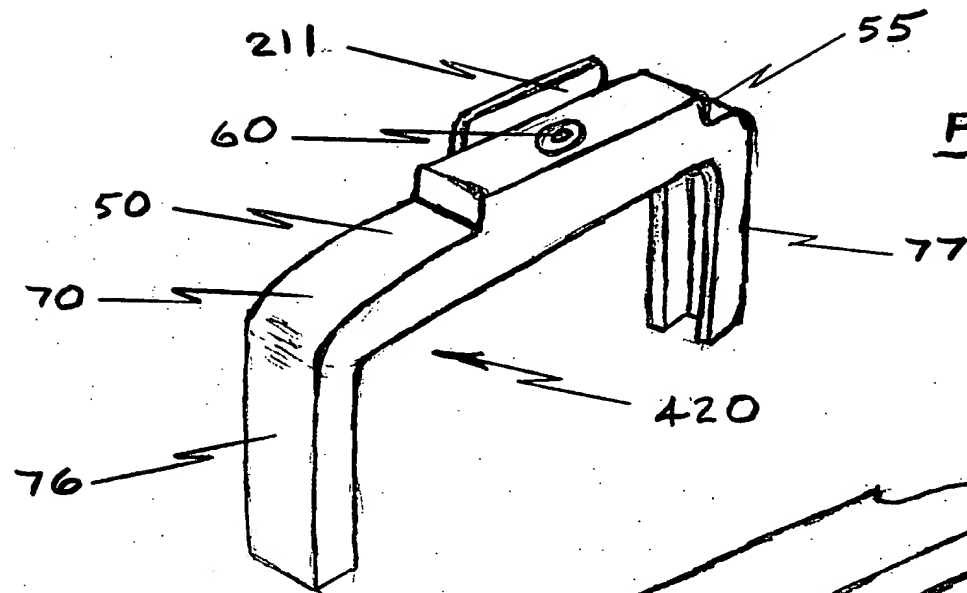


FIG VIII

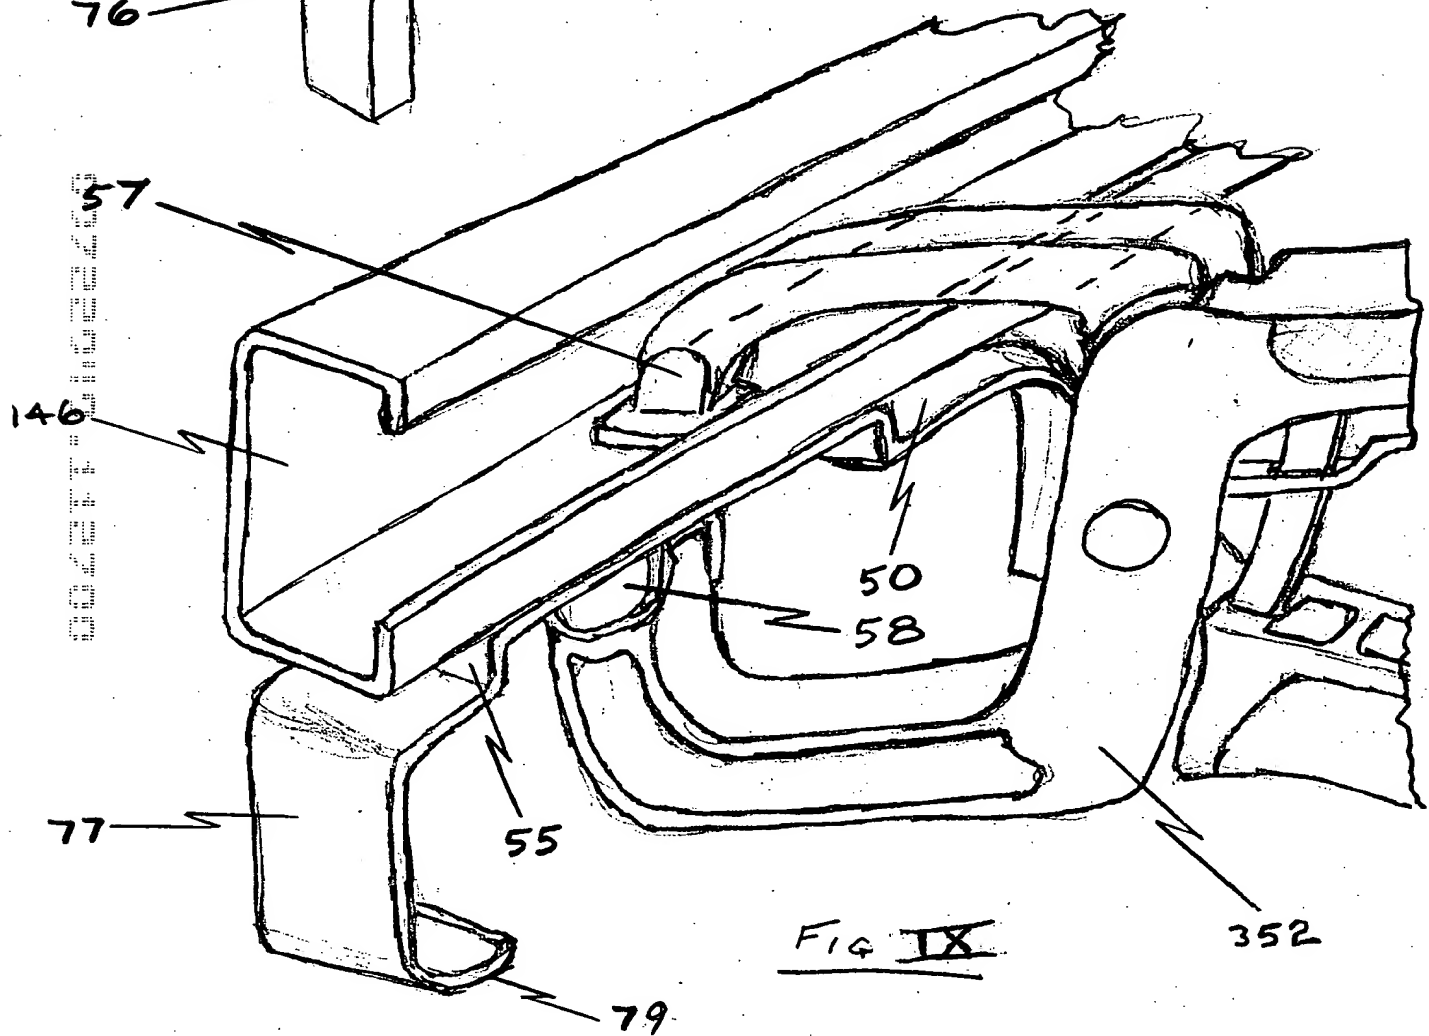


FIG IX

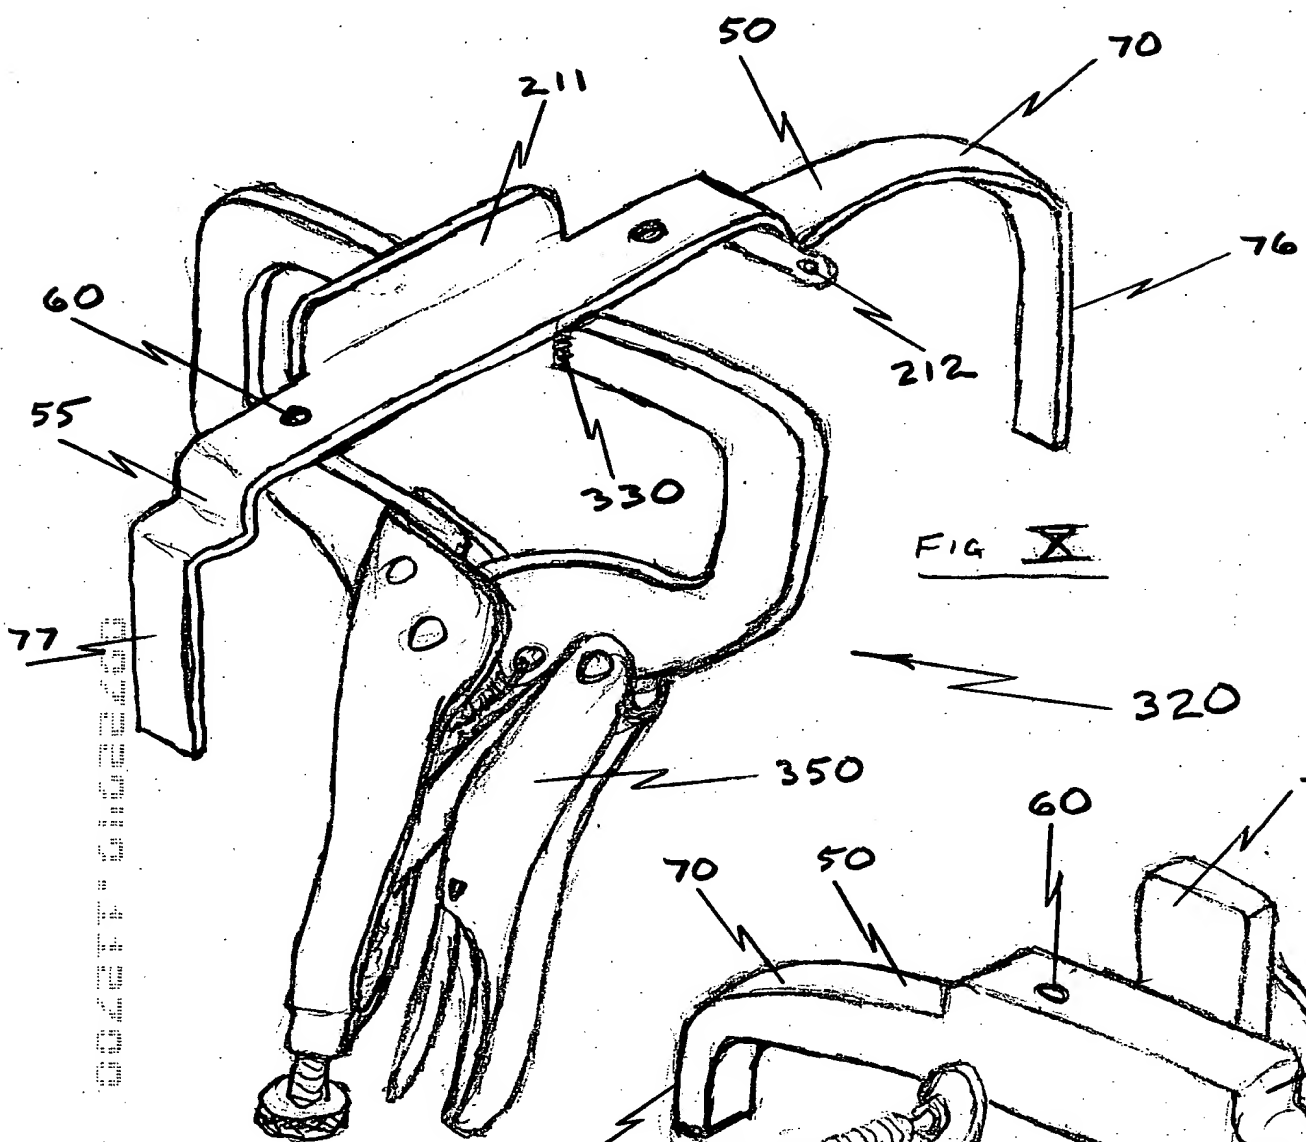


FIG X

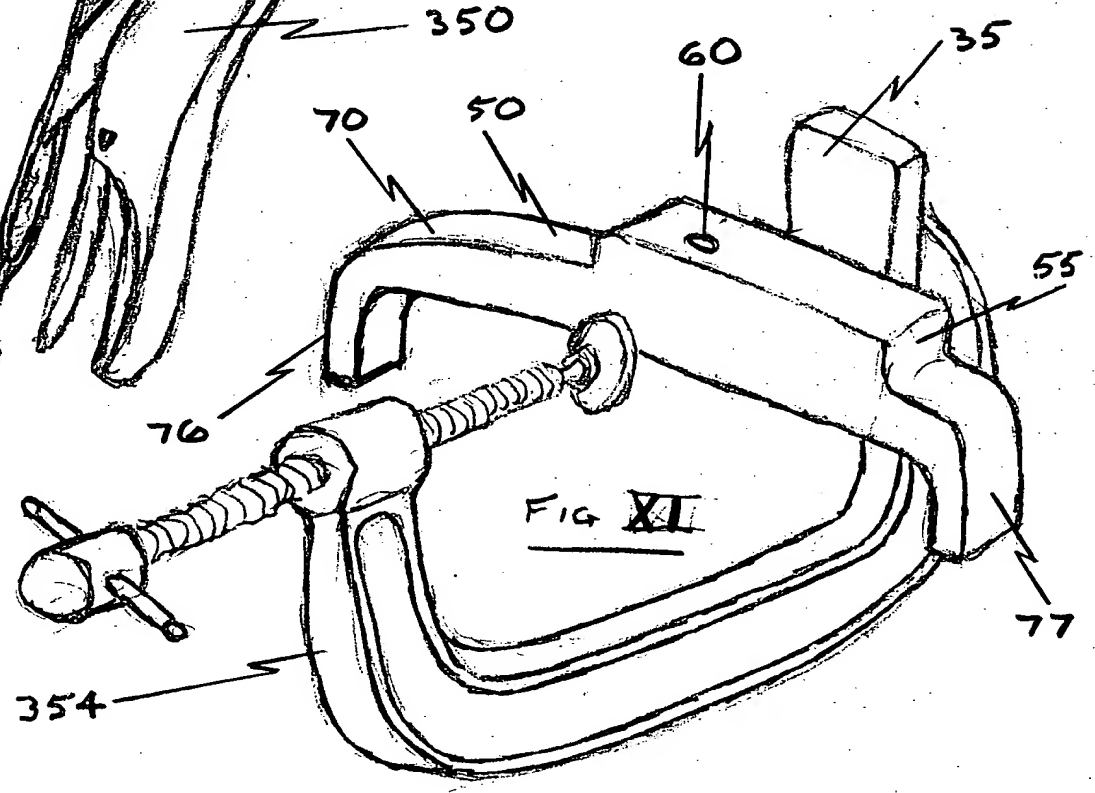
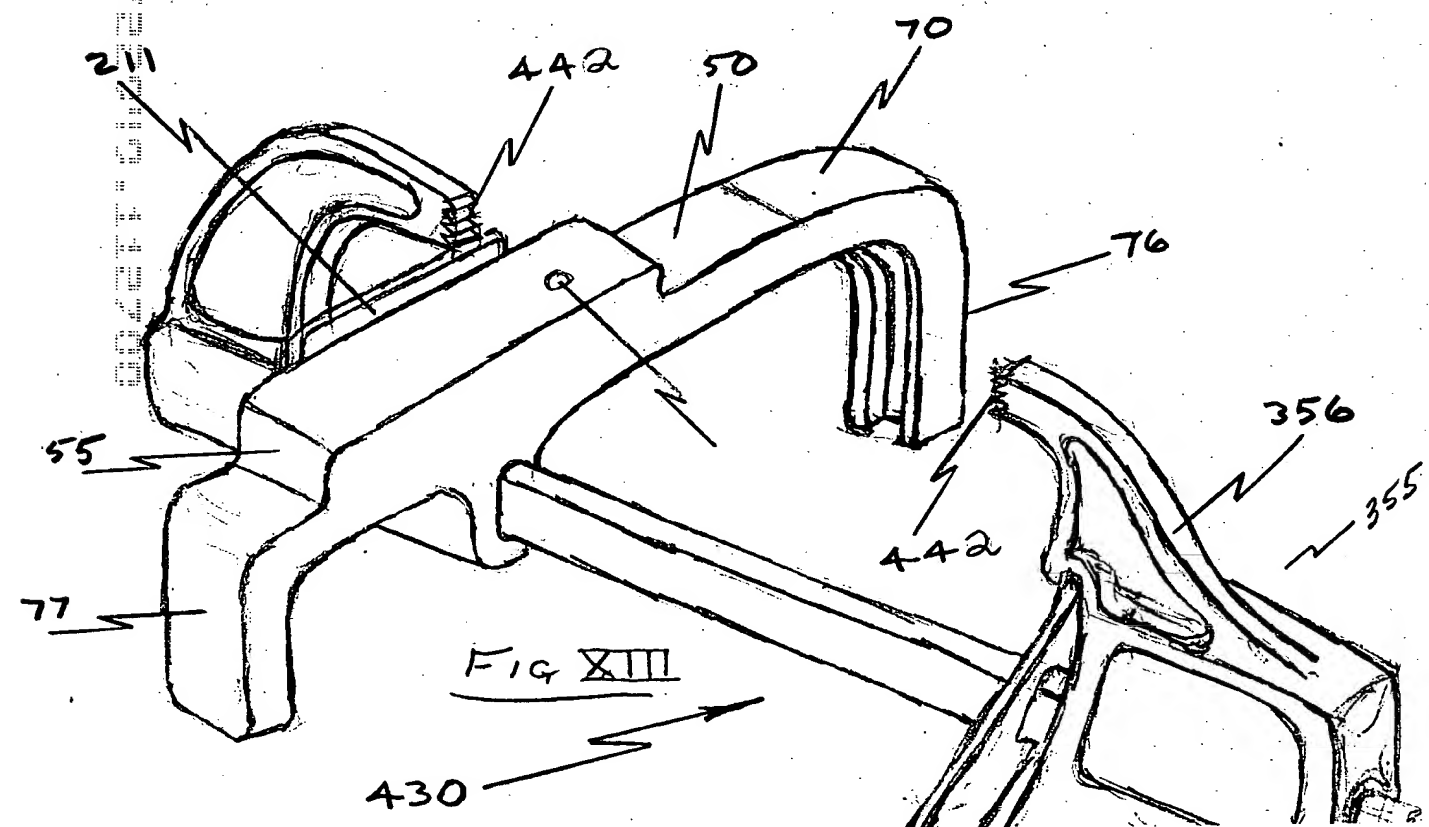
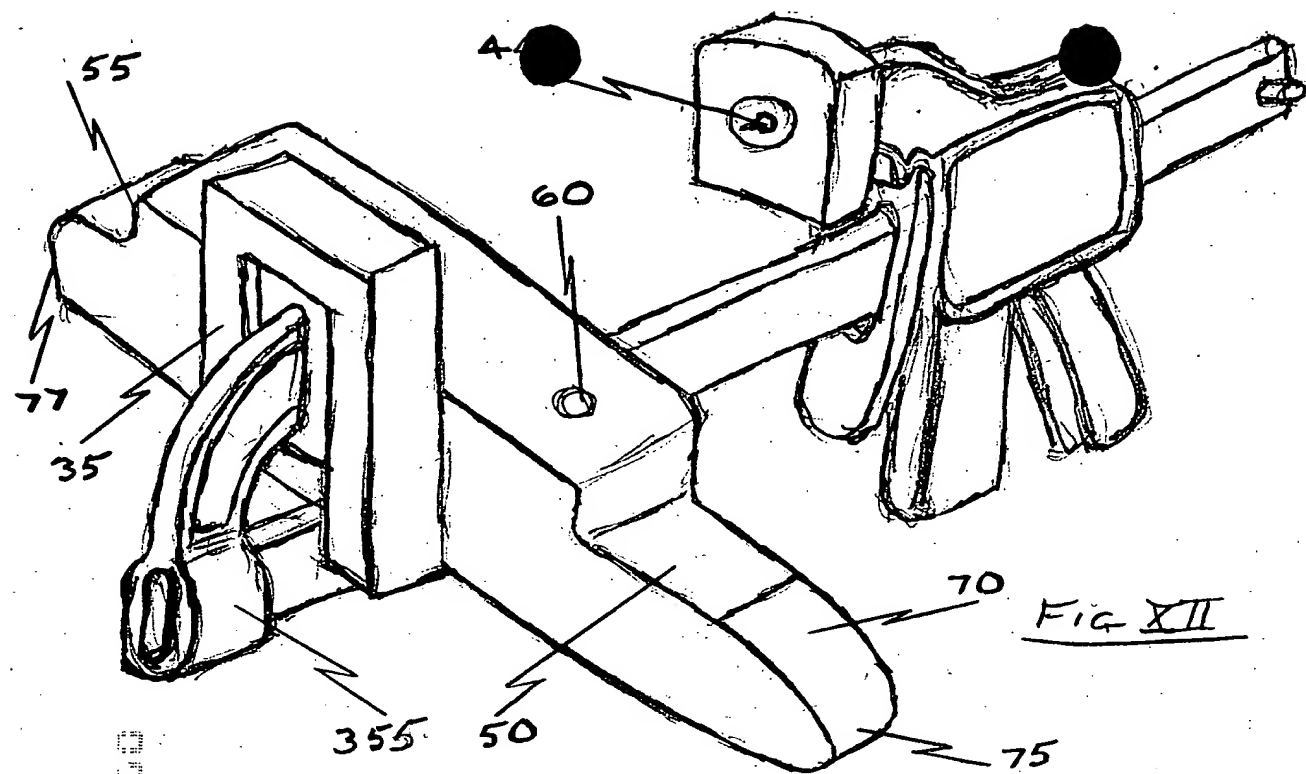
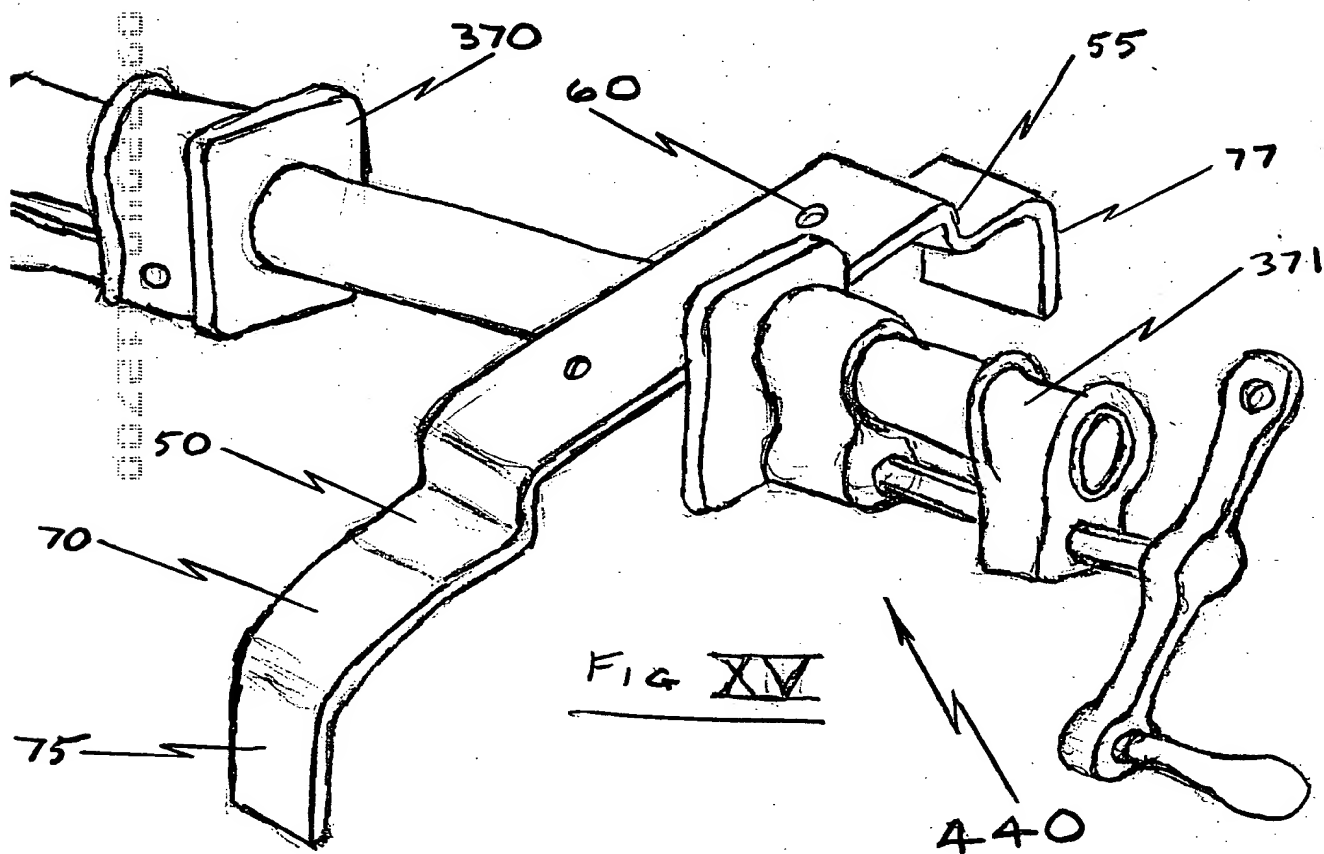
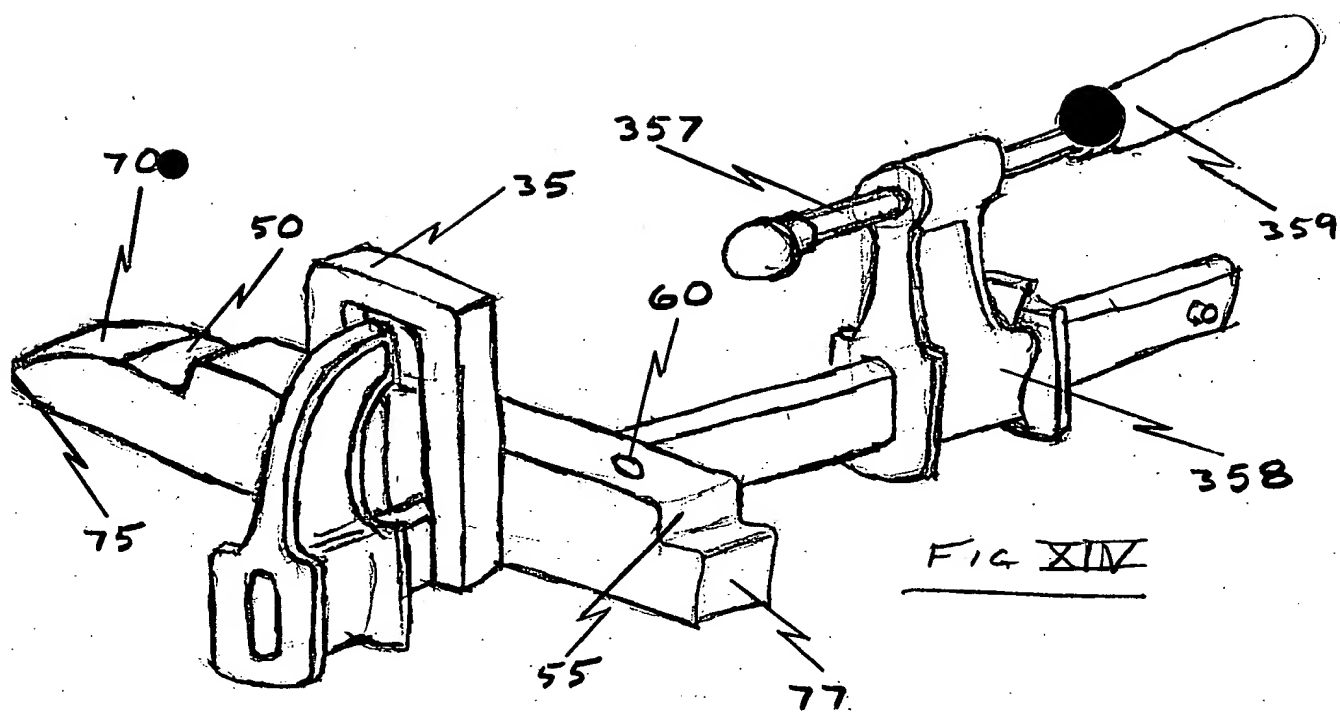
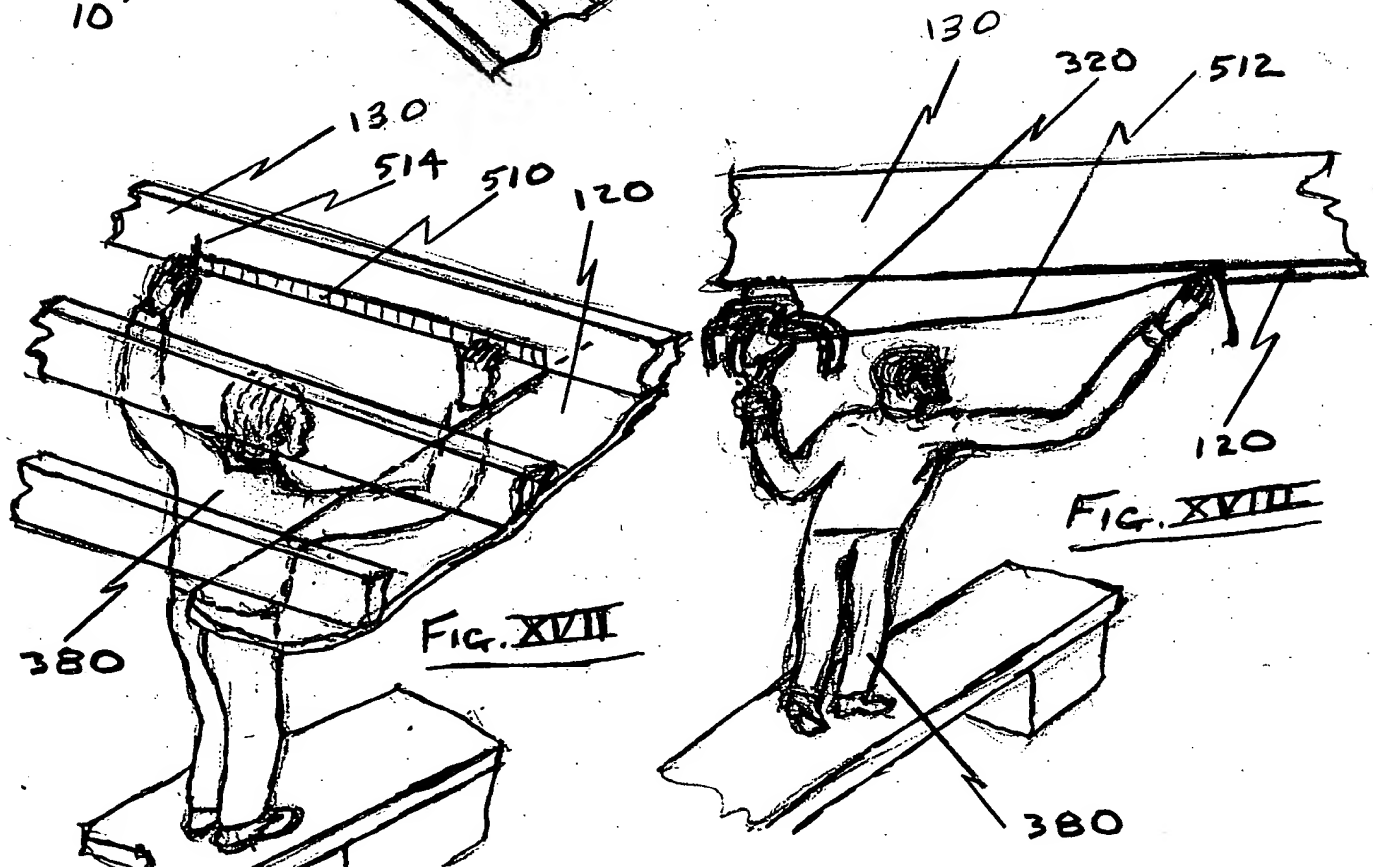
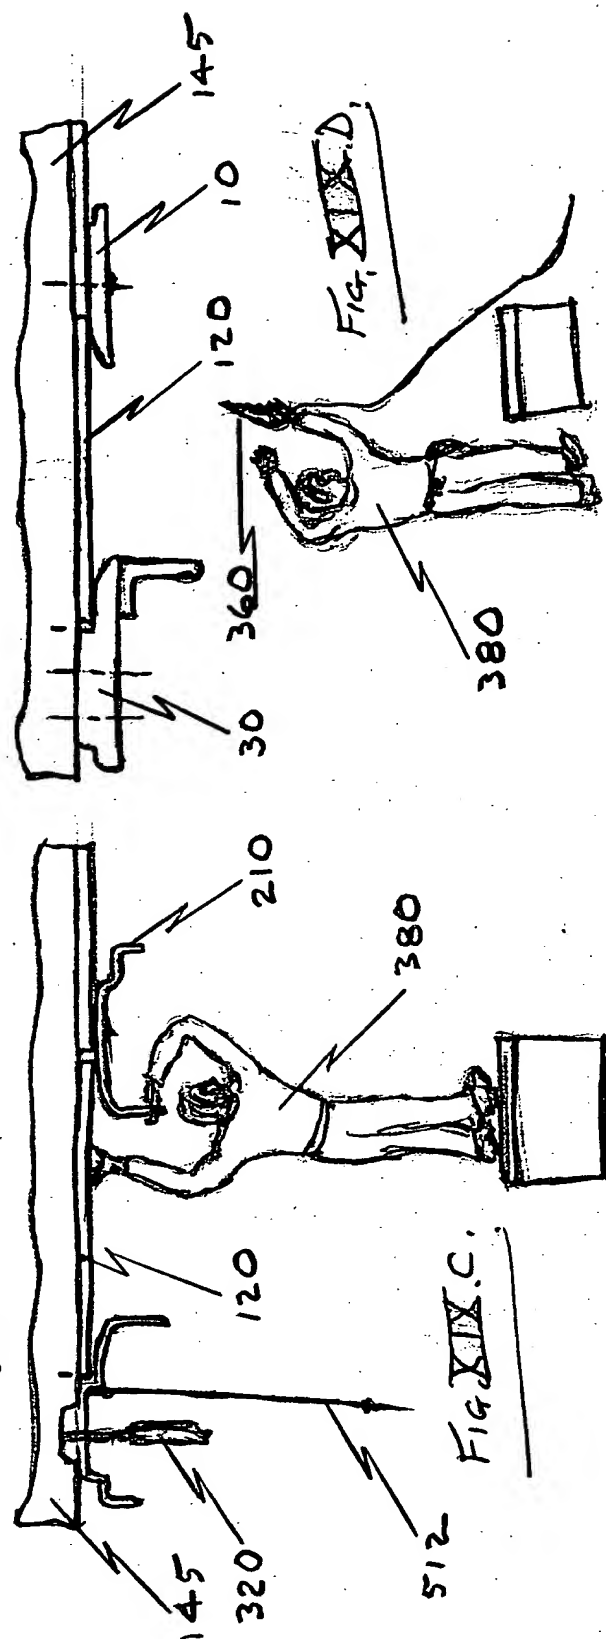
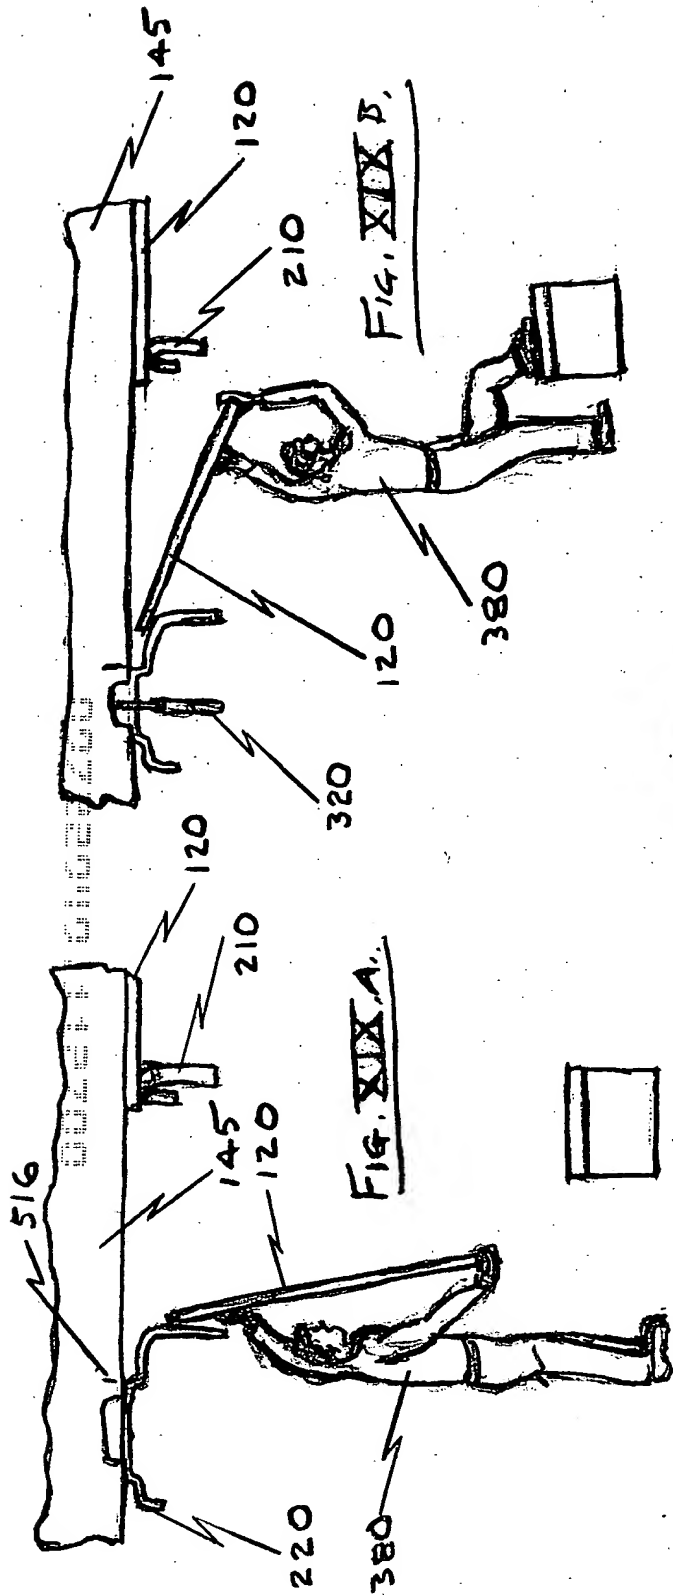


FIG XI

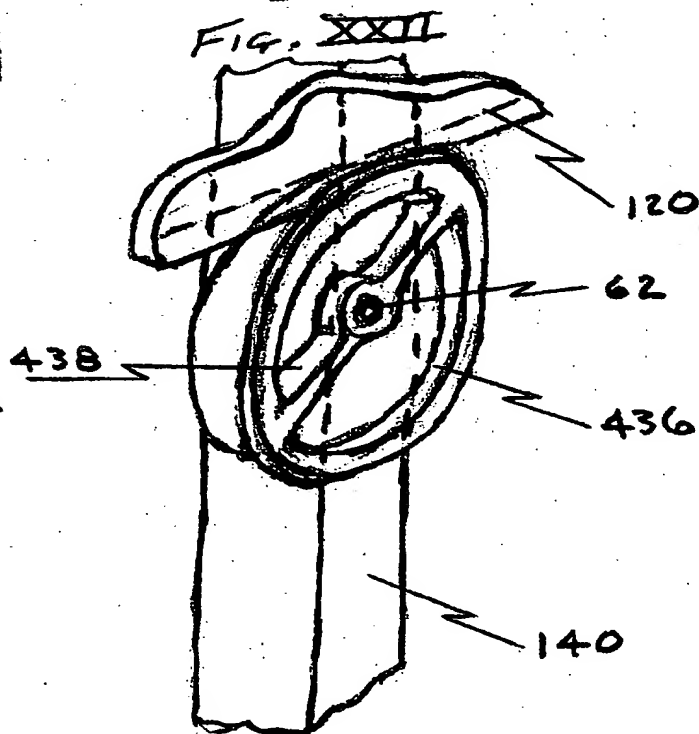
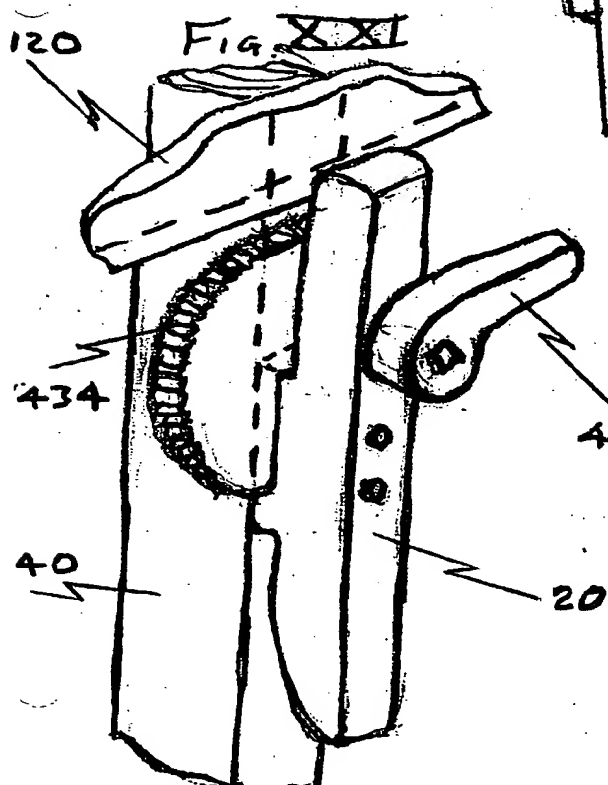
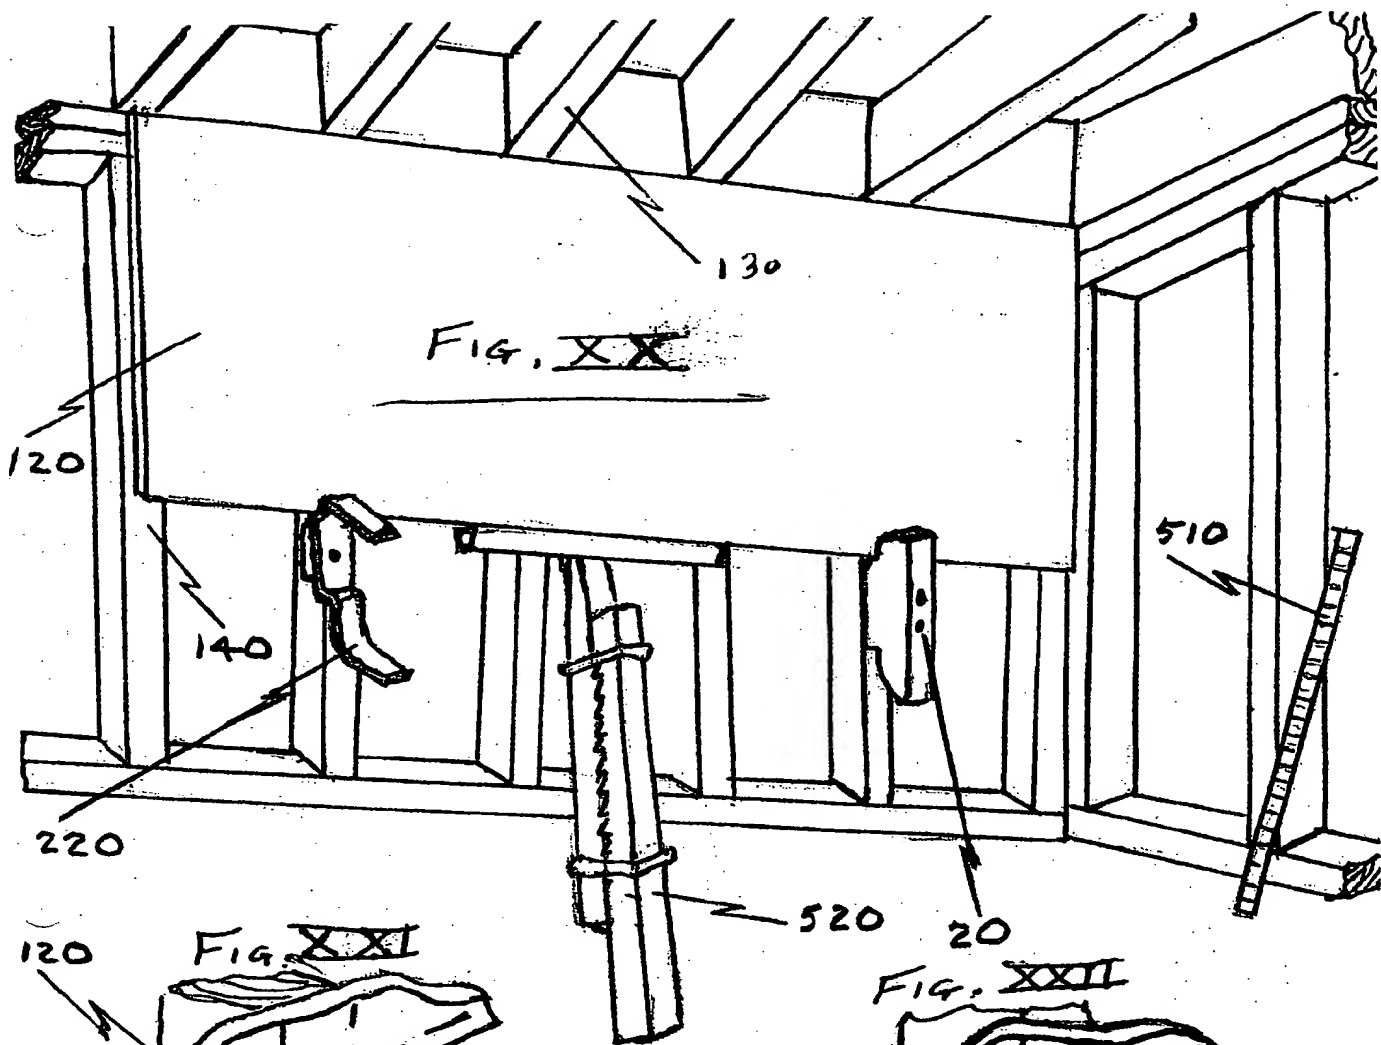












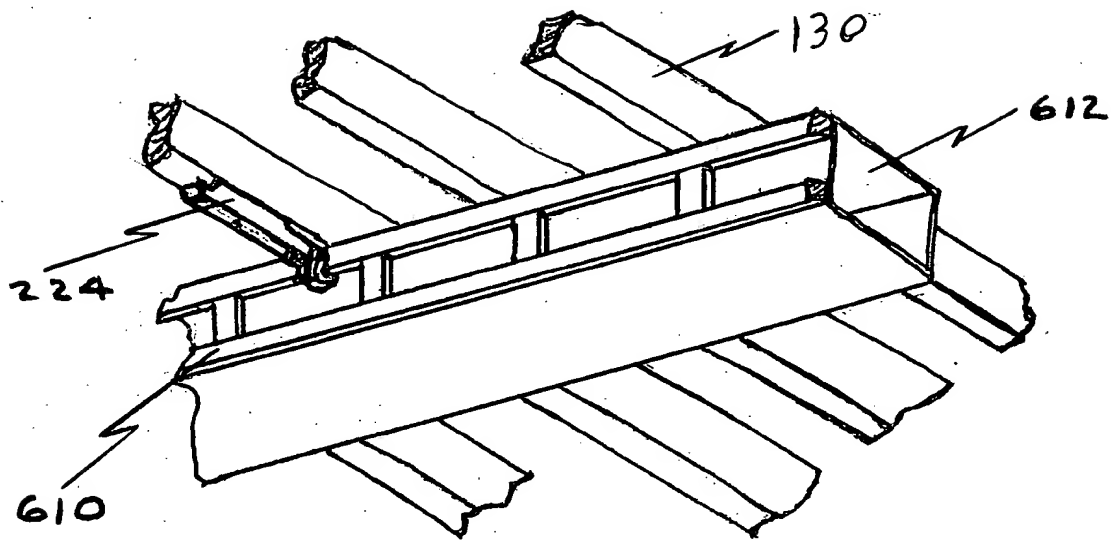


FIG. XXIII

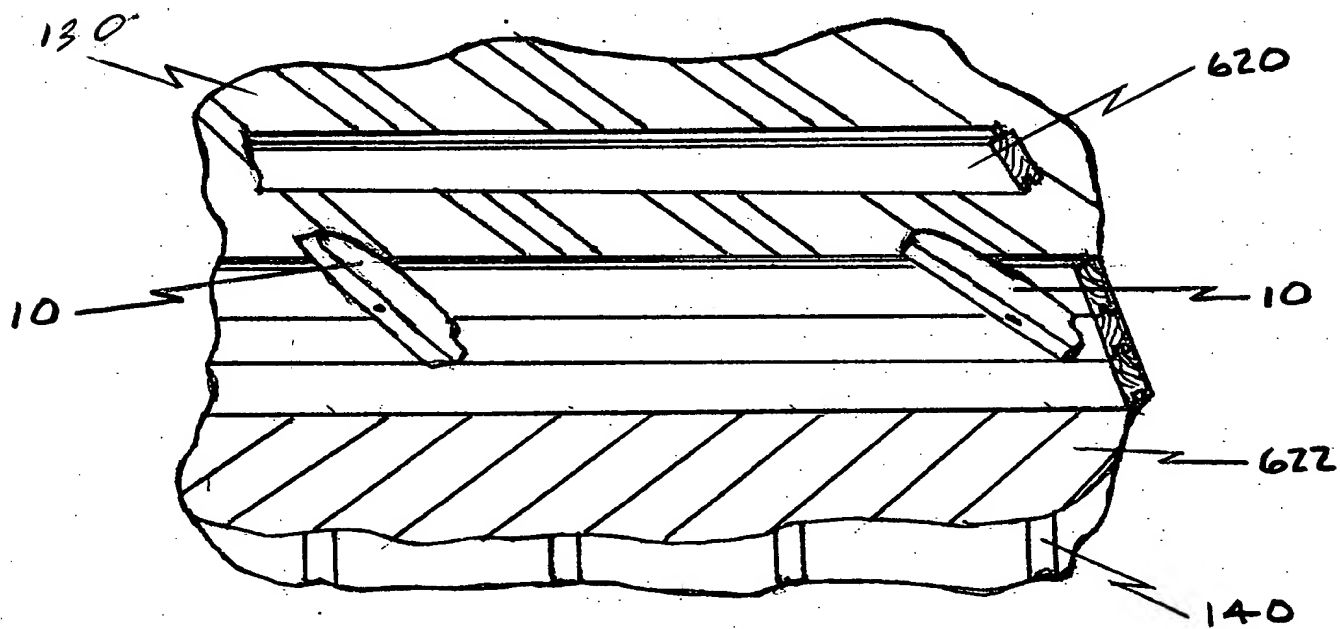


FIG. XXIV

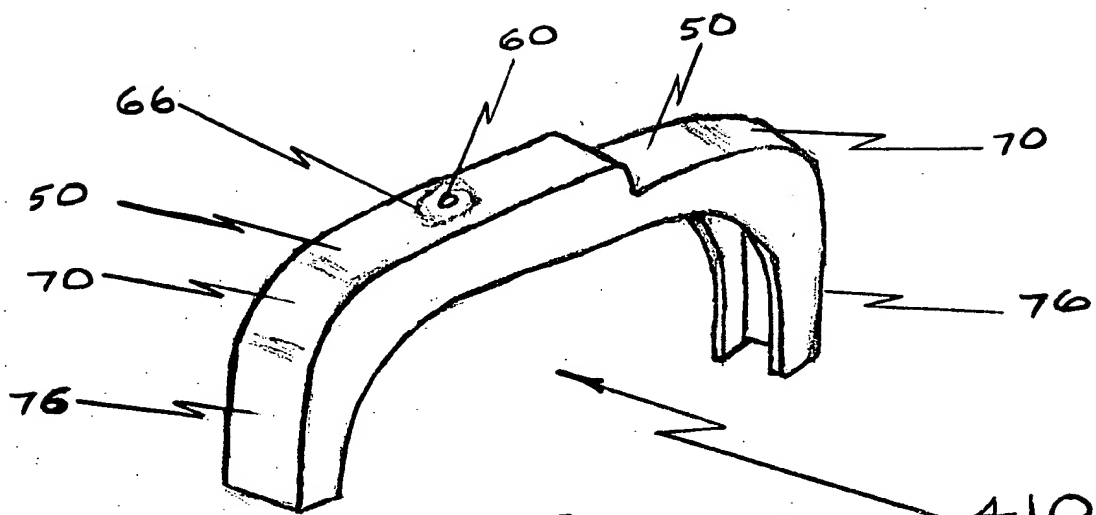


FIG. XXV

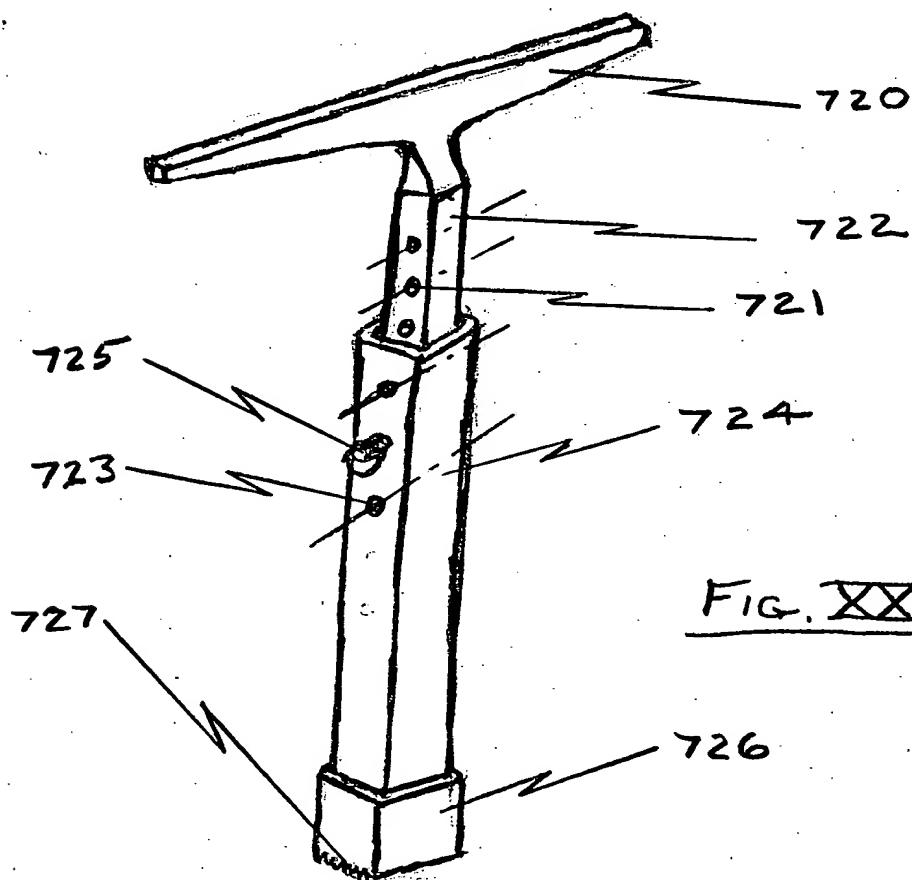


FIG. XXVI

This diagram shows an exploded perspective view of a bracket assembly. The main component is a bracket (70) with a curved arm (76) and a base (55). A curved piece (50) is positioned near the arm. Three rectangular components (810A, 810B, 810C) are shown above the bracket, each with a central hole. These components are secured by screws (62) and a nut (64). A small component (812) is shown to the right of the bracket, also secured by screws (62). A dimension line (77) indicates a distance between the bracket and the 812 component.

A perspective view of a mechanical assembly. It features several parallel longitudinal members connected by transverse components. Labels include 435 pointing to a top-left corner bracket, 130 pointing to a longitudinal member, 66 pointing to a transverse component, 76 pointing to another transverse component, 82 pointing to a central vertical support or pin, 70 pointing to a lower transverse component, 50 pointing to a bottom longitudinal member, 120 pointing to a top-right corner bracket, and 410 pointing to a bottom-right corner bracket.